

DECLARATION OF PERFORMANCE No 31/SZ/16

- Unique identification code of the product-type: **FIXPLUG 10**
- Intended use/es: **Nailed-in plastic anchor for fixing of external thermal insulation composite systems with rendering in concrete and masonry substrates.**
- Manufacturer: **Klimas Sp. z o.o.
ul. Wincentego Witosa 135/137
Kuźnica Kiedrzyńska 42-233 Mykanów**
- Authorised representative: **Not applicable**
- System/s of AVCP: **system 2+**
- European Assessment Document: **a) Guidelines EAD 330196-01-0604 edition 10/2017
b) European Technical Assessment ETA-15/0373 of 07/02/2023
c) Deutsches Institut für Bautechnik – DIBt
d) Technical Assessment Body Nr. 1488**
- Declared performance/s:

Essential characteristic	Performance												
Characteristic resistance	Base material	Concrete C12/15	Concrete C16/20-C50/60	Clay bricks MZ	Calcium silicate bricks KS	Calcium silicate hollow block KSL	Vertically perforated ceramic block MEGA-MAX	Vertically perforated clay brick Porotherm 25	Vertically perforated clay bricks HLZ	Lightweight concrete hollow blocks HBL	Lightweight concrete blocks LAC	Autoclaved concrete blocks 350 kg/m ³	Autoclaved concrete blocks 650 kg/m ³
	NRk[kN]	0,75	1,20	0,90	0,90	0,60	NPD	NPD	0,40	0,90	0,75	0,50	0,75
Edge distances and spacing	Min. allowable spacing s _{min} = 100mm					Min. allowable edge distance c _{min} = 100mm							
Displacement	N[kN]/ δ[mm]	0,25/0,46	0,4/0,74	0,3/0,78	0,3/0,9	0,2/0,64	NPD	NPD	0,13/0,79	0,3/0,75	0,25/0,84	0,17/0,57	0,25/0,87
Plate stiffness	Diameter of the anchor plate					60mm							
	Load resistance of the anchor plate					1,6kN							
	Plate stiffness					0,6kN/mm							
Point thermal transmittance	Point thermal transmittance coefficient					0,000W/K							
	Insulation thickness					120-260mm							

NRk – characteristic resistance ; N – tension load ; δ – displacements *) surface mount; **) immersed mount

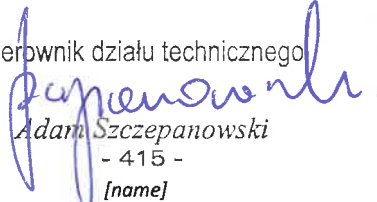
- Appropriate Technical Documentation and/or Specific Technical Documentation: **Not applicable**

The performance of the product identified above is in conformity with the set of declared performance/s. This declaration of performance is issued, in accordance with Regulation (EU) No 305/2011, under the sole responsibility of the manufacturer identified above.

Signed for and on behalf of the manufacturer by:

Kuźnica Kiedrzyńska
09.02.2023

[place]
[date of issue]

Kierownik działu technicznego

Adam Szczepanowski
- 415 -
[name]
[signature]