

PRODUCT DATA SHEET – WS-4,2


Section 1. PRODUCT DESCRIPTION

SELF-DRILLING SCREW FOR FIXING STEEL SHEETS IN STEEL CONSTRUCTION – WS-4,2

Self-drilling screw WS-4,2 is made of heat-treated carbon steel in galvanized zinc coating 12 µm (WS) or SQ Ceramic coating (WS-D). Screw has SW hex head, pin threaded for use in steel and self-drilling tip.

Use:


- fixing steel sheets in steel constructions
- flashings
- making lap joints in steel sheets




Self-drilling screws hold European Technical Assessment: ETA-16/0443

Section 2. METHOD OF INSTALLATION

1. Original self-drilling screws delivered by the manufacturer can be used only
2. Before installation identify the substrate, its thickness and environmental conditions (expressed as corrosivity categories), and then select screws which meet the above criteria
3. Correctly select screw type, its length, drilling capacity depending on sum of thickness values of members being fixed
4. Drilling capacity for each screw is given in corresponding Product Data Sheet and European Technical Assessment and stands for the sum of thickness values of members being fixed
5. Make sure to set optimum rotary speed when screwing (max. 2500 rpm), as too high rotary speed may cause burning of drilling bits and make it impossible to fasten the screw
6. At all times screws should be installed perpendicularly to the substrate surface

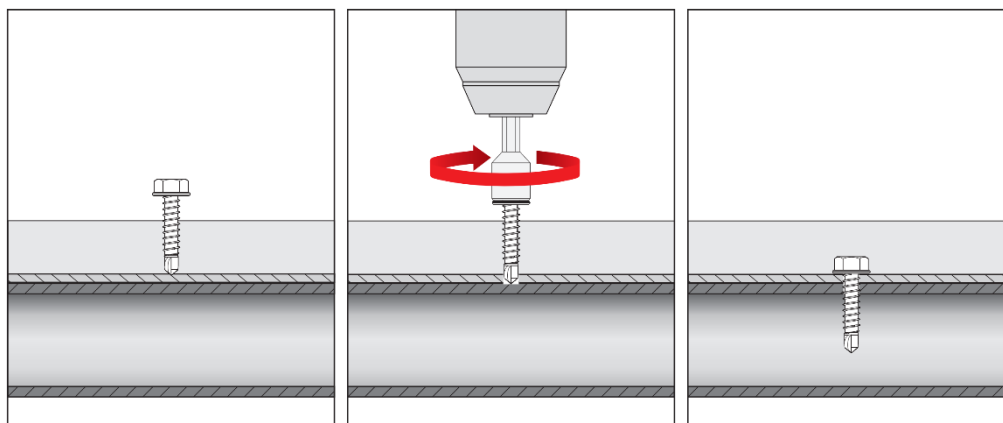

Section 3. TECHNICAL DATA

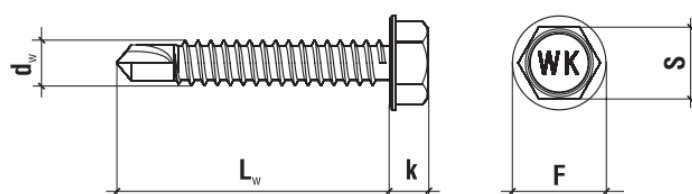

PRODUCT DATA SHEET – WS-4,2

| TECHNICAL PARAMETERS | | |
|-------------------------------|-------------------|---------------------------------------|
| Parameter | Unit | Value |
| Screw diameter | d_w [mm] | 4,2 |
| Drilling capacity | Σt_i [mm] | ≤ 2 |
| Wrench size | S [mm] | SW-7 |
| Head height | k [mm] | 4,5 |
| Head diameter | F [mm] | 8,6 |
| Tip length | [mm] | 7,0 |
| Screw material | - | carbon steel |
| Corrosion protection | WS | galvanized zinc coating 12 μ m |
| | WS-D | SQ Ceramic coating |
| EPDM washer | D [mm] | - |
| Coating to RAL palette | - | - |
| Substrate material | - | steel ≥ S280GD |
| European Technical Assessment | - | ETA-16/0443 |

| INSTALLATION PARAMETERS | | |
|-------------------------------------|----------------|--------------|
| Parameter | Unit | Value |
| Screw diameter | d_w [mm] | 4,2 |
| Diameter of hole in the substrate | d_0 [mm] | - |
| Min. depth of hole in the substrate | h_0 [mm] | - |
| Anchorage depth | h_{eff} [mm] | push-through |
| Min. substrate thickness | h_{min} [mm] | 0,50 |
| Min. spacing | s_{min} [mm] | 50 |
| Min. distance from edge | c_{min} [mm] | 25 |

| RESISTANCE | | | | | |
|---|----------------------------|-----------|-----------|-----------|-----------|
| Characteristic pull-out / shear strength [kN] | | | | | |
| Substrate thickness [mm] | Steel sheet thickness [mm] | | | | |
| | 0,50 | 0,63 | 0,75 | 0,88 | 1,00 |
| 0,50 | 0,43/0,92 | 0,43/0,92 | 0,43/0,92 | 0,43/0,92 | 0,43/0,92 |
| 0,63 | 0,43/0,92 | 0,57/1,11 | 0,57/1,11 | 0,57/1,11 | 0,57/1,11 |
| 0,75 | 0,43/0,92 | 0,57/1,11 | 0,69/1,66 | 0,69/1,66 | 0,69/1,66 |
| 0,88 | 0,43/0,92 | 0,57/1,11 | 0,69/1,66 | 0,73/1,84 | 0,73/1,84 |
| 1,00 | 0,43/0,92 | 0,57/1,11 | 0,69/1,66 | 0,73/1,84 | 0,78/1,88 |

*Partial safety factor of 1.33 recommended

| SELECTION TABLE | | | | |
|------------------------------------|-------------------------------|---|--------------------------------------|------------------------------------|
| WS (galvanized zinc coating ZN) | WS-D* (SQ Ceramic coating) | Screw dimensions $d_w \times L_w$ [mm] | Max. usable length t_{fix} [mm] | Number of pieces in a box [pcs] |
| WS-42016 | WS-D-42016 | 4,2 x 16 | 1 | 500 |
| WS-42019 | WS-D-42019 | 4,2 x 19 | 7 | 500 |
| WS-42025 | WS-D-42025 | 4,2 x 25 | 14 | 500 |

*Screw on request and to order

Section 4. REMARKS

1. All previous versions of this Product Data Sheet shall cease to be valid
2. Data given in this Product Data Sheet is in accordance with current knowledge and published in good faith. KLIMAS Sp. z o.o. is not responsible for correctness and quality of the fixing if recommendations regarding method of use and installation are not followed.